

Ferrule - AI 6 -18 GN - 3200111

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)




Ferrule, sleeve length: 18 mm, length: 26 mm, color: green

Why buy this product

- ✓ The metal sleeves are made from soft tin-plated electrolytic copper
- ✓ In terms of dimensions, these ferrules conform to DIN 46228-4: 1990-09
- ✓ The color code of the plastic insulating collar is based on the French standard NF C 63-023: 1994-02

Key Commercial Data

| | |
|------------------------|---|
| Packing unit | 100 STK |
| Minimum order quantity | 100 STK |
| GTIN |  4 017918 093761 |
| GTIN | 4017918093761 |
| Sales Key | 05 |

Technical data

Dimensions

| | |
|--|--------|
| Length (b) | 26 mm |
| Maximum stripping length | 21 mm |
| Sleeve length | 18 mm |
| Inner dimension of the insulating collar (d) | 6.2 mm |
| Ferrule diameter | 3.5 mm |
| Insulating collar thickness | 0.3 mm |
| Sleeve wall thickness | 0.2 mm |

Ambient conditions

| | |
|----------------------------|---|
| Short-term temperature | 120 °C |
| Max. permanent temperature | 105 °C (-40°C no load / 0°C dynamic load) |

Ferrule - AI 6 -18 GN - 3200111

Technical data

General

| | |
|--|---|
| Color | green |
| Components | free from silicone and halogen |
| Flammability rating according to UL 94 | HB |
| Material | CU-DHP |
| Insulating material | Polypropylen |
| Coating | tin-plated (galvanic) |
| Conductor category | Stranded conductors, class 2, 5, 6 / B, C, K, M |

Standards and Regulations


| | |
|--|---------------------|
| Connection in acc. with standard | CSA |
| Flammability rating according to UL 94 | HB |
| Design according to standard | DIN 46228-4:2017-05 |

Environmental Product Compliance

| | |
|------------|---|
| China RoHS | Environmentally friendly use period: unlimited = EFUP-e |
| | No hazardous substances above threshold values |

Drawings

Dimensional drawing

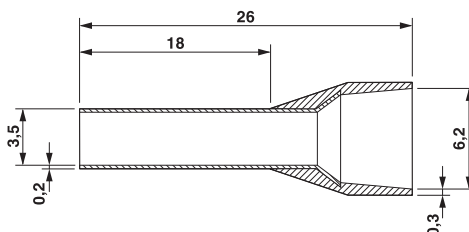

Approvals

Approvals

Approvals

CSA / CSAus / EAC / EAC / UL Listed / cUL Listed / cULus Listed

Ex Approvals

Approval details

Ferrule - AI 6 -18 GN - 3200111

Approvals

| | | | |
|--------------|--|---|---------------------|
| CSA | | http://www.csagroup.org/services-industries/product-listing/ | 247397 |
| CSAus | | http://www.csagroup.org/services-industries/product-listing/ | 247397 |
| EAC | | | EAC-Zulassung |
| EAC | | | 7500651.22.01.00246 |
| UL Listed | | http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm | E488001 |
| cUL Listed | | http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm | E488001 |
| cULus Listed | | http://www.csagroup.org/services-industries/product-listing/ | |

Phoenix Contact 2018 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>