

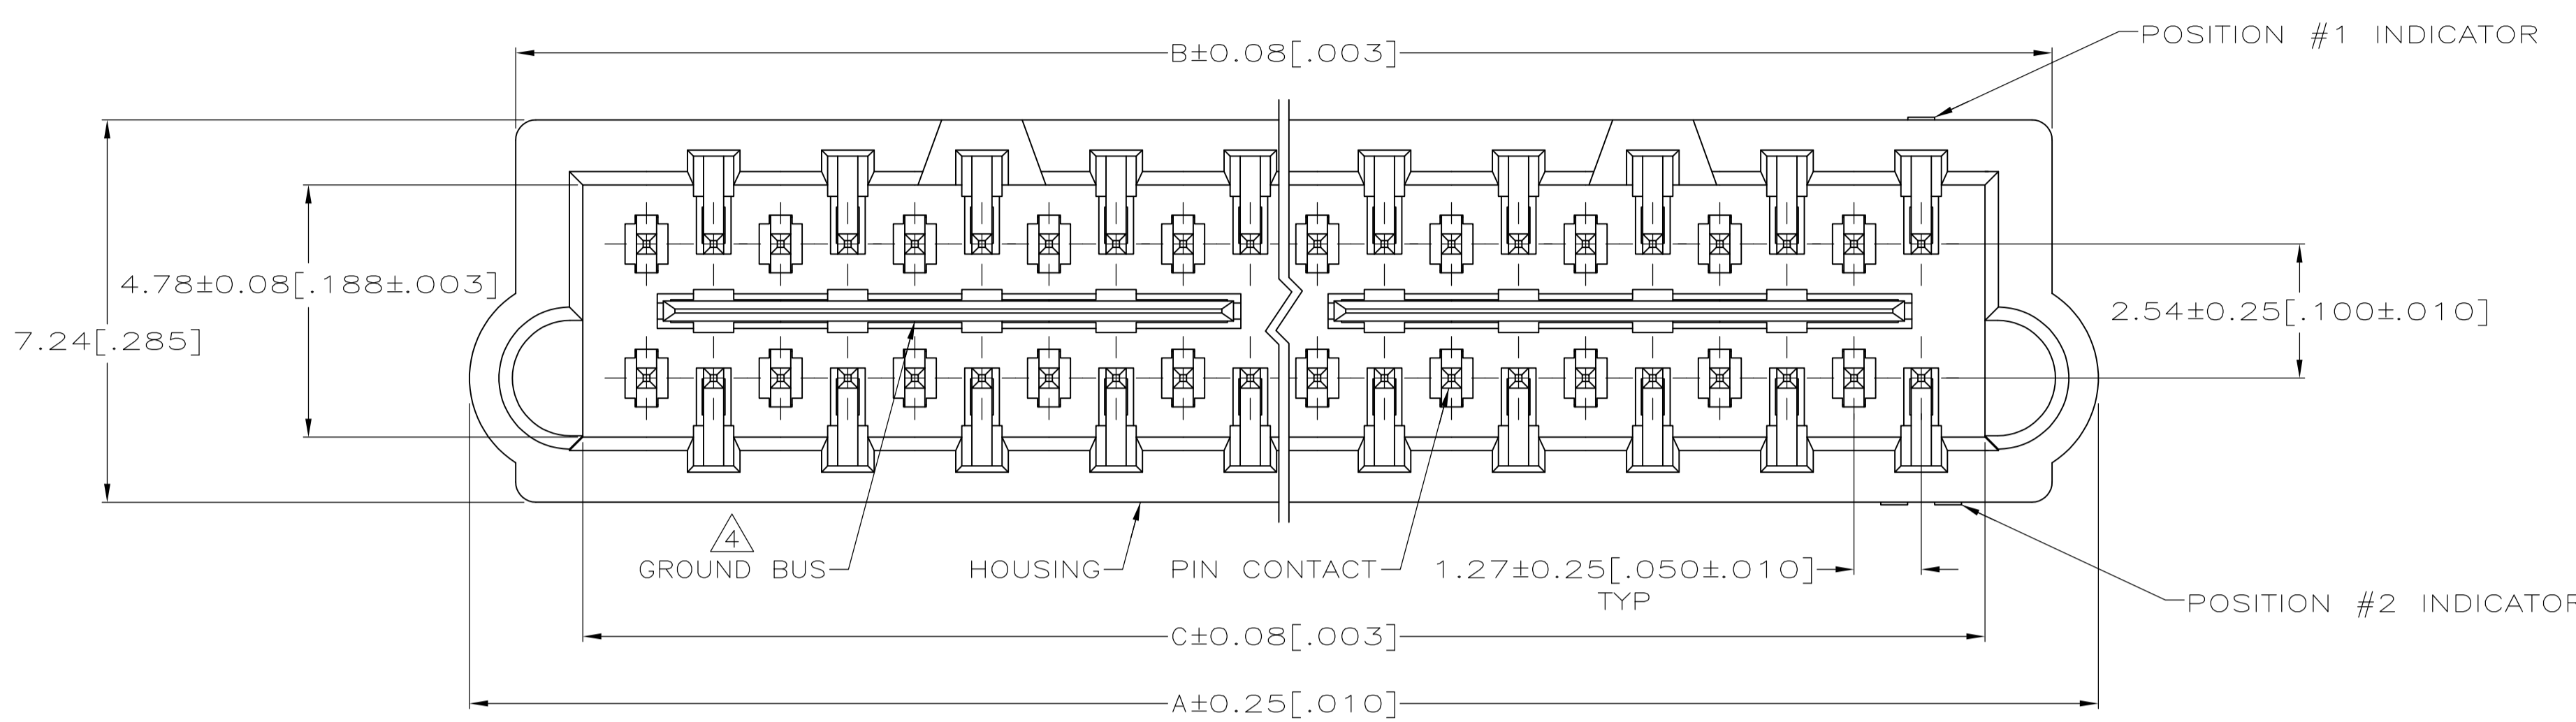


LOC		DIST		REVISIONS			
AD	47	REV	DATE	BY	CHK	APPV	
B		REVISED PER ECO-11-024315	12JAN12	KH	DD		

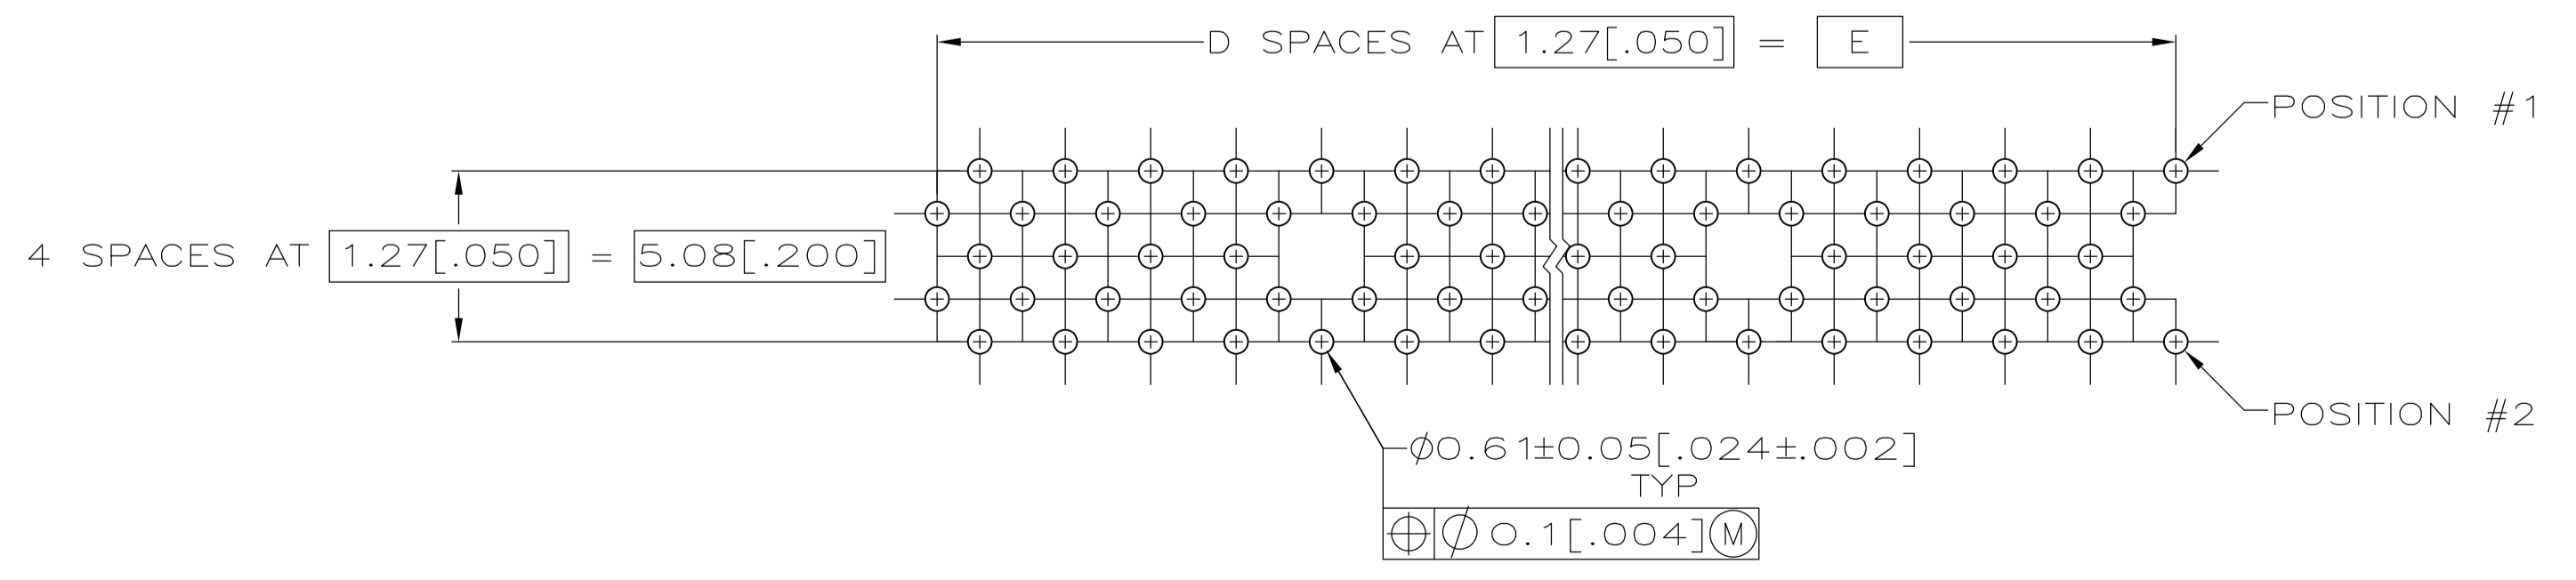

- 1 HOUSING: HIGH TEMPERATURE THERMOPLASTIC, COLOR NATURAL.
PIN CONTACTS: PHOSPHOR BRONZE.
GROUND BUSES: PHOSPHOR BRONZE.
- 2 CONTACTS & GROUND BUSES: 0.00076(0.00030) MIN. GOLD PER ASTM B 488 ON CONTACT AREA, 0.00254-0.00762(0.00100-0.00300) MATTE TIN PER ASTM B 545 ON SOLDER TAIL, ALL OVER 0.00127-0.00254(0.00050-0.00100) MATTE NICKEL PER SAE AMS-QQ-N-290 ON ENTIRE CONTACT.
- 3 DATE CODE MARKED IN AREA INDICATED ON NEAR SIDE.
- 4 ONE GROUND BUS WITH 4 TAILS PER EACH 20 PIN CONTACTS.

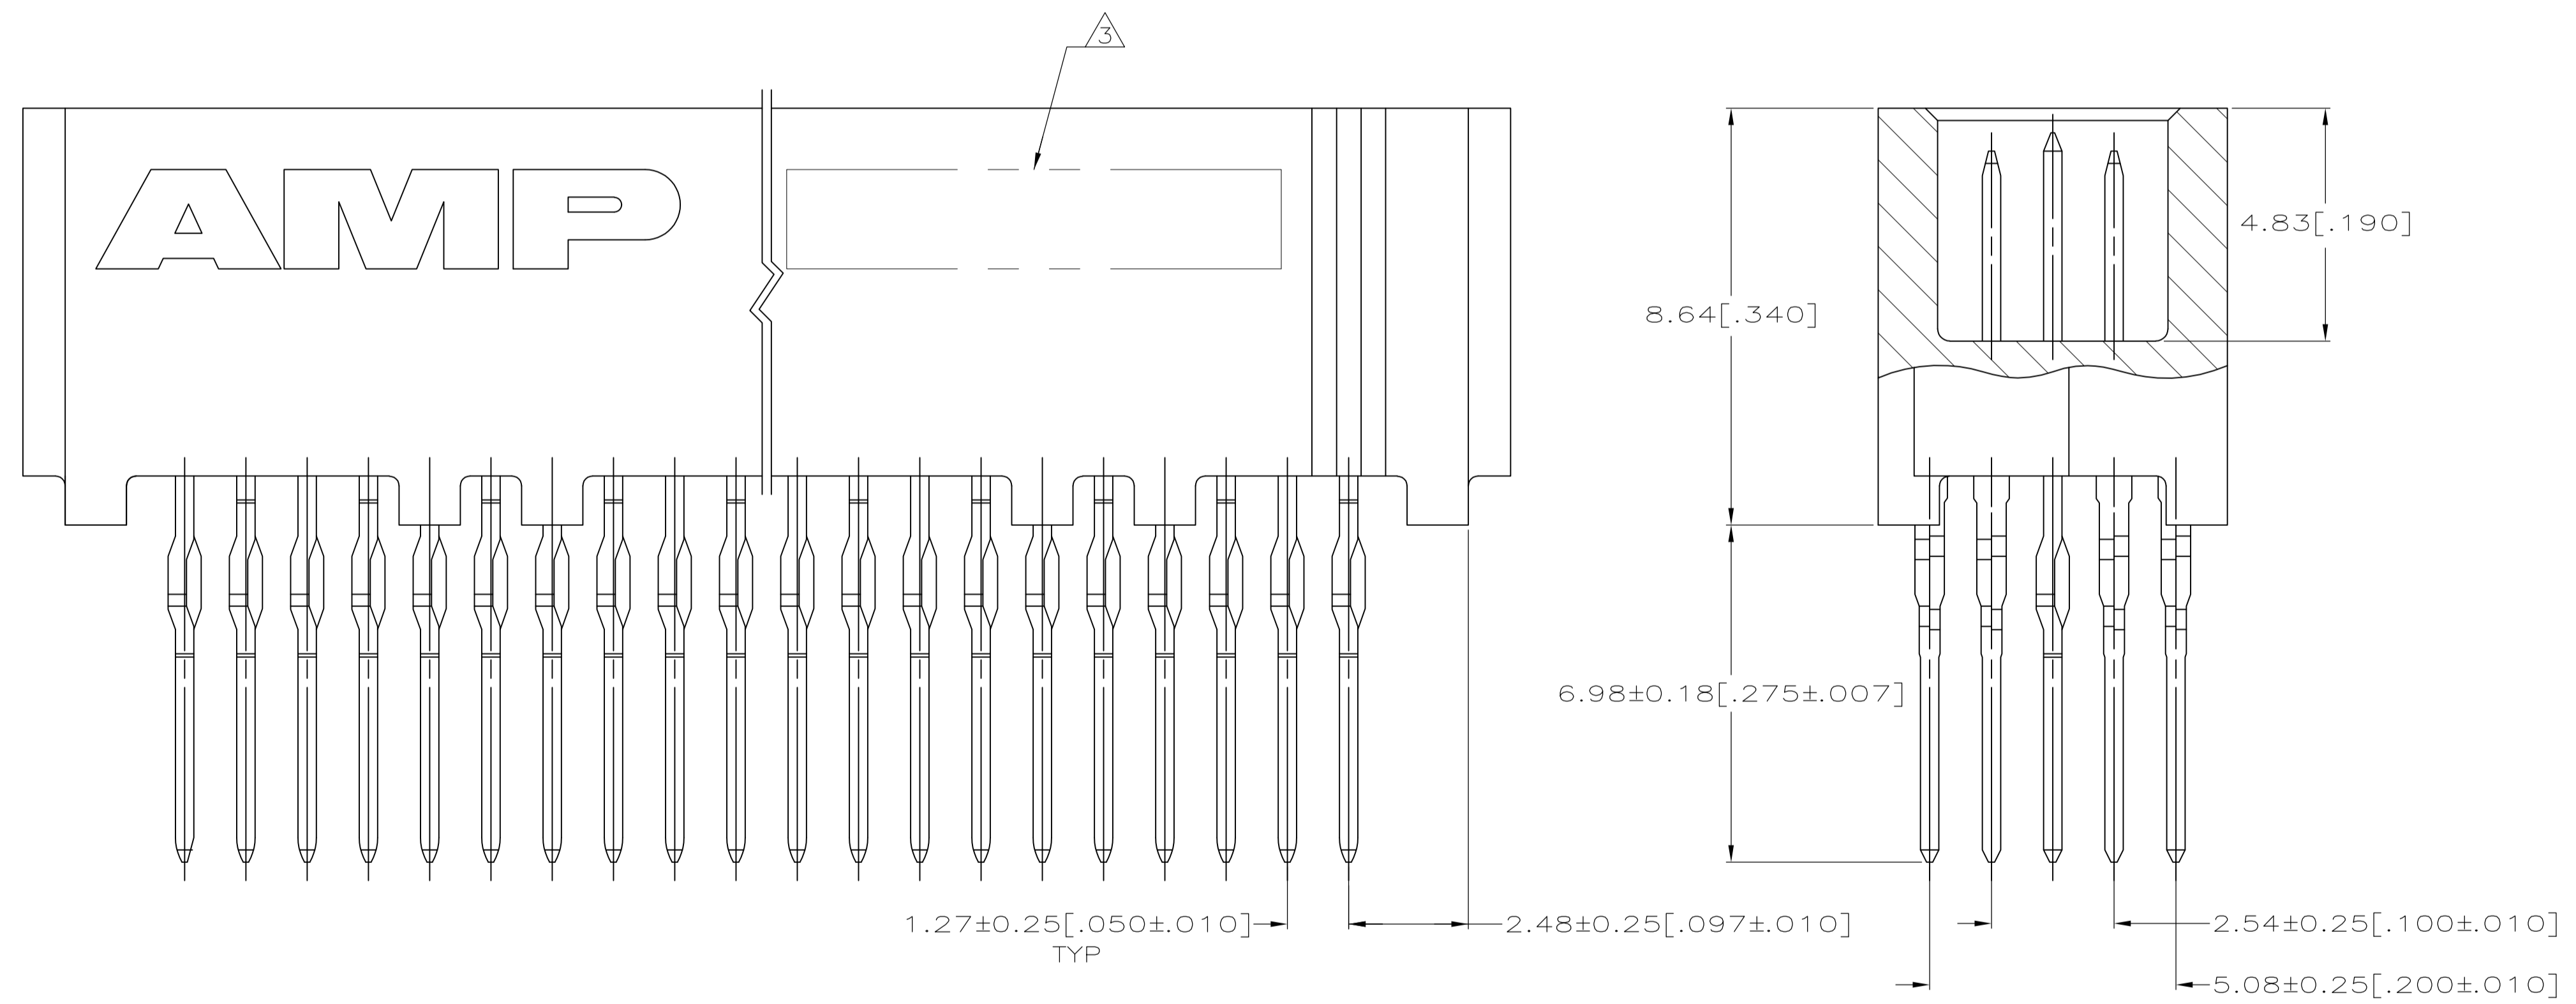

RECOMMENDED PC BOARD HOLE LAYOUT (VIEWED FROM CONNECTOR SIDE) SCALE 5:1

62.23 [2.450]	49	64.72 [2.548]	67.18 [2.645]	68.94 [2.714]	100	5536326-4
E	D	C	B	A	NO OF POS	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DIN G. ATTADIA 01-20-05	 TE Connectivity
DIMENSIONS: INCHES		CHK D. DIXON 01-20-05	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APPV D. DIXON 01-20-05	NAME
0. PLC ± -	1. PLC ± -	PRODUCT SPEC	PLUG ASSEMBLY, .430 VERTICAL STACK, .275 ACTION PIN TAIL, BOARD TO BOARD, MICROSTRIP
2. PLC ± 0.13 [0.005]	3. PLC ± -	APPLICATION SPEC	108-1272
4. PLC ± -	ANGLES ± -	SIZE	114-11005
MATERIAL 1	FINISH 2	WEIGHT	RESTRICTED TO
CUSTOMER DRAWING		SCALE 10:1	SHEET 1 OF 1